


D

Z5560 Manual 1.1 en

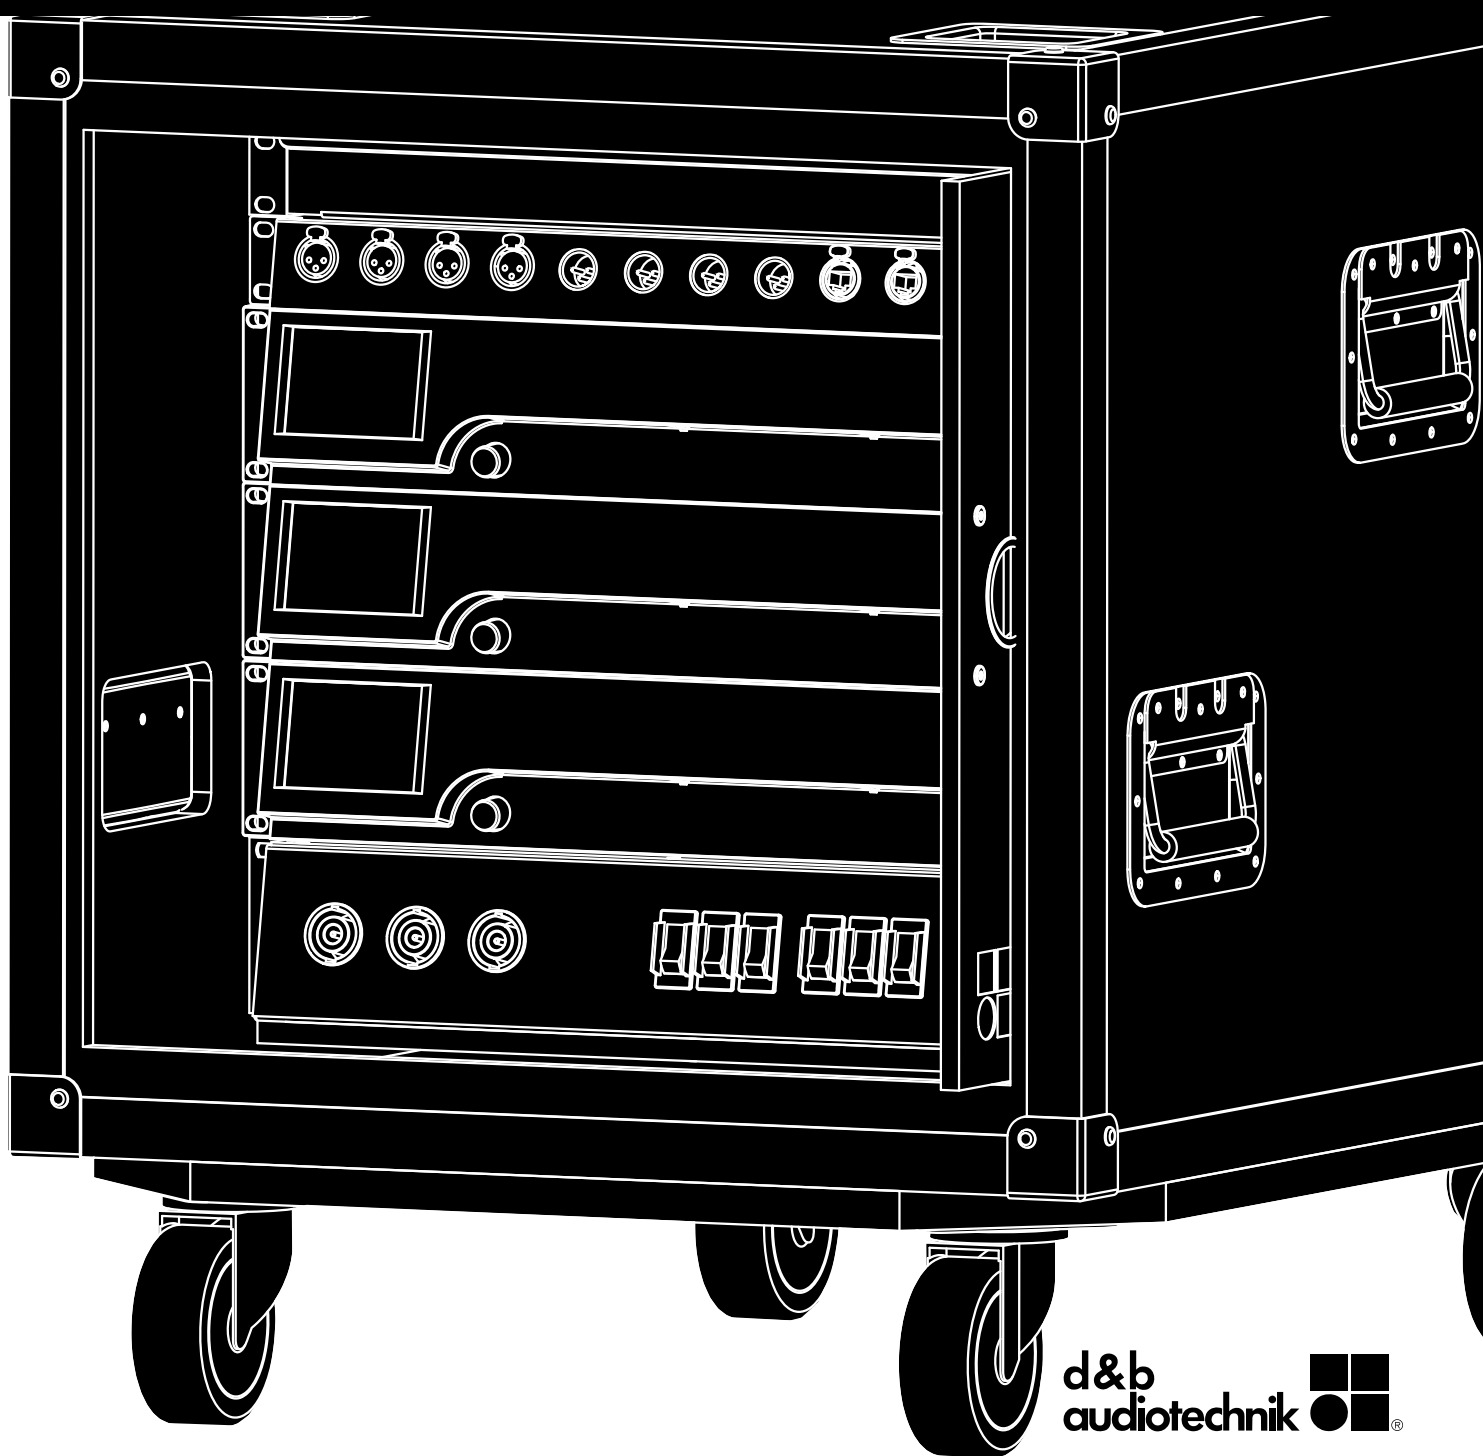

General information

Z5560 Manual

Version: 1.1 en, 12/2016, D2028.EN .01

Copyright © 2016 by d&b audiotechnik GmbH; all rights reserved.

Keep this document with the product or in a safe place so that it is available for future reference.



We recommend you to regularly check the d&b website for the latest version of this document.

When reselling this product, hand over this document to the new owner.

If you supply d&b products, please draw the attention of your customers to this document. Enclose the relevant documents with the systems. If you require additional documents for this purpose, you can order them from d&b.

d&b audiotechnik GmbH
Eugen-Adolff-Straße 134, D-71522 Backnang, Germany
T +49-7191-9669-0, F +49-7191-95 00 00

1 Z5560 D20 Touring rack assembly CEE..... 4
1.1 Intended use..... 4
1.2 Scope of supply..... 4
2 Handling, cooling and placement..... 5
2.1 Handling..... 5
2.2 Cooling and placement..... 5
3 X5565 Mains power distributor - 32 A CEE..... 6
3.1 Intended use..... 6
3.2 Rear panel..... 6
3.2.1 AMP 1 / AMP 2 / AMP 3..... 6
3.2.2 MAINS SUPPLY..... 6
3.2.3 MAINS LINK - 32 A CEE..... 7
3.3 Front panel..... 7
3.3.1 MAINS..... 7
3.3.2 AUXILIARY MAINS OUTPUTS 16A..... 7
3.3.3 AMPLIFIER MAINS SUPPLIES 16A..... 8
3.3.4 4 CH OUTPUTS - NL8..... 8
4 Z5338 I/O Panel..... 9
4.1 INPUT..... 9
4.2 INPUT LINK..... 9
4.3 REMOTE..... 9
5 Z5333 Rack Link..... 11

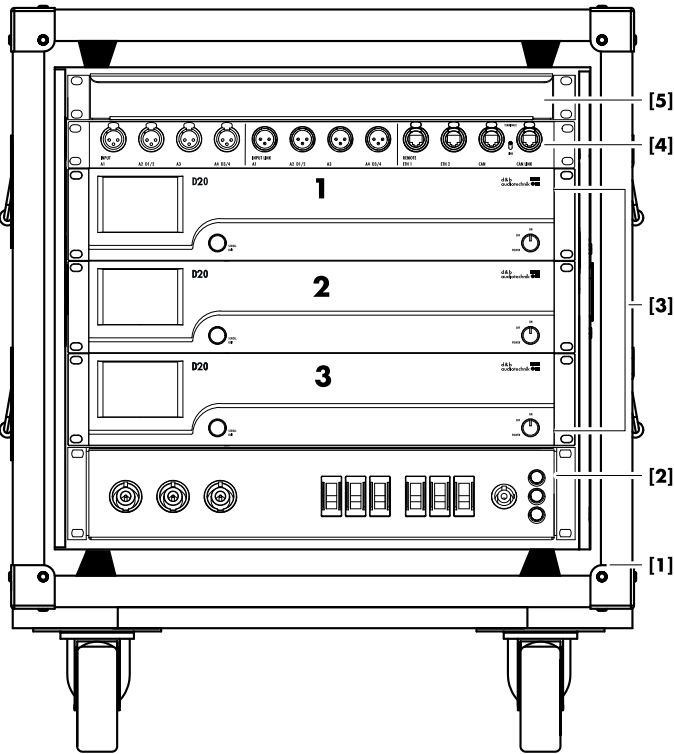

1.1 Intended use

The Z5560 D20 Touring rack assembly is designed as a closed system rack providing mains power distribution and connector interfaces for 3 x D20 amplifiers. For this purpose, the touring rack is equipped with a mains power distribution device (X5565), which also serves as a loudspeaker connector panel. Also incorporated is an I/O panel (Z5338), which serves as a connector interface for both analog and digital audio signals as well as network connectors for either Ethernet or CAN-Bus remote capabilities.


1.2 Scope of supply

Before starting up, please verify the shipment for completeness and proper condition of the items. If there is any sign of obvious damage, do not operate the rack assembly and contact your local dealer from whom you received the rack assembly.


Pos.	Qty.	d&b Code	Description
[1]	1	Z5560	Touring rack assembly 10 RU (CEE) - with shock mounted 19" frame.
Including:			
[2]	1	X5565	Mains power distribution and LS Panel (CEE).
[3]	3	Z2750	D20 Amplifier. (To be ordered separately.)
[4]	1	Z5338	I/O Panel.
[5]	1		Rack drawer 1 RU.
[6]	1	Z5333	Rack link cable (contained in the rack drawer [5]).
		D2028.EN .01	Z5560 Manual.

Dimensions and weight

Height x width x depth 710 x 600 x 715 mm
..... 28 x 23.6 x 28.2"
Total weight 98.5 kg / 217 lb

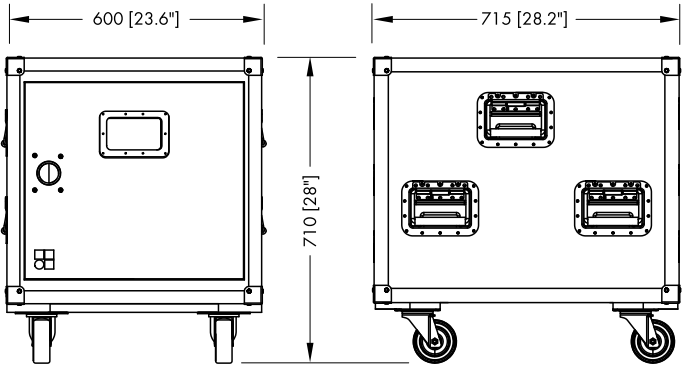

2 Handling, cooling and placement

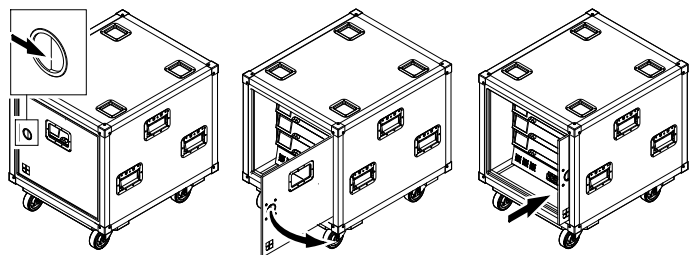



2.1 Handling

The touring rack is equipped with two sliding doors allowing quick and easy access to the front and rear panels of the devices.



1. Unlock the door lock mechanism.
2. Open the door and ...
3. push the door to the rear into its park position.

2.2 Cooling and placement

When using the d&b Z5560 D20 Touring rack assembly, make sure to provide sufficient space of 0.5 m (1.6 ft) at the front and rear of the touring rack to ensure sufficient cooling airflow.

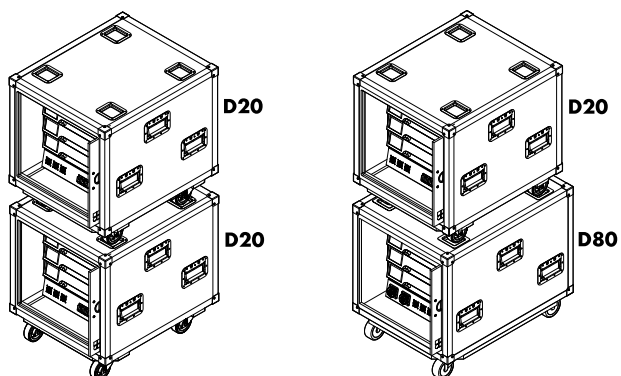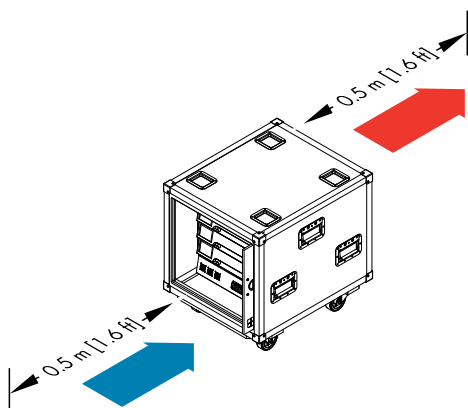


D20 Touring rack assemblies as well as D20 and D80 Touring racks can be stacked or positioned side by side.

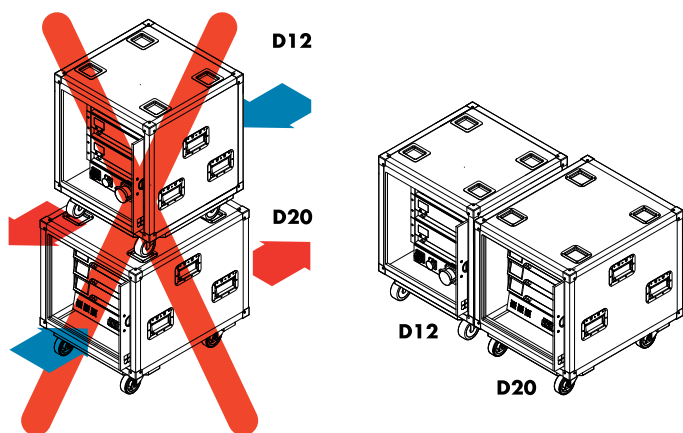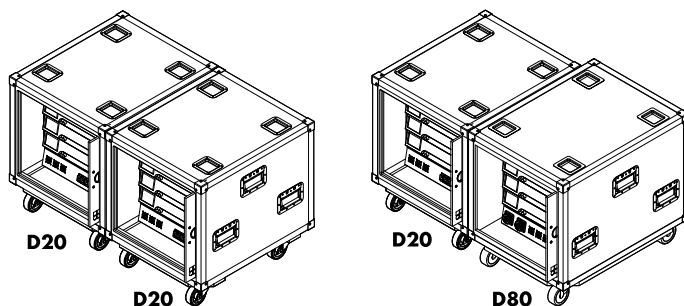


When combining D20 Touring rack assemblies with D12 Touring rack assemblies or any other rack assembly that produces an opposing airflow, observe the following restrictions:

- Do not stack D20 and D12 Touring racks or any other rack assemblies with opposing airflow.
- D20/D12 Touring rack assemblies can be positioned side by side.



3 X5565 Mains power distributor - 32 A CEE

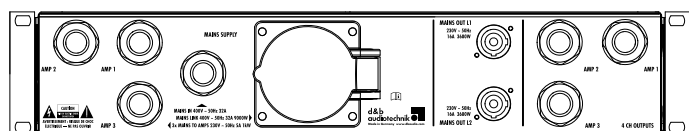

X5565 Rear panel

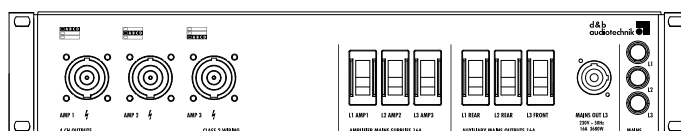

X5565 Front panel

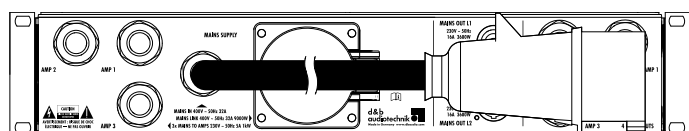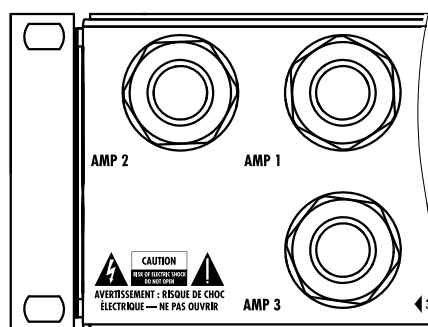

3.1 Intended use

The X5565 Mains power distributor is designed and dimensioned to provide and distribute the mains power supply necessary for the three D20 amplifiers. It also serves as a loudspeaker connection panel for different connection options. It is a protective class 1 unit with IP class 20 (NOT rain-, drip-, or splash-proof!).

The X5565 Mains power distributor must not be used for any other purpose or outside the system rack.

3.2 Rear panel

3.2.1 AMP 1 / AMP 2 / AMP 3

Three fixed single-phase mains power lines (L1-L2-L3), each fitted with a powerCON® mains connector, are provided for the internal mains power supply of the amplifiers.

Corresponding circuit-breakers are provided on the front panel. See also ⇒ Chapter 3.3.3 "AMPLIFIER MAINS SUPPLIES 16A" on page 8.

3.2.2 MAINS SUPPLY

The X5565 Mains power distributor is supplied with a fixed 3-phase power cord equipped with a 32 A CEE (Cekon) mains connector.



WARNING!


Potential risk of electric shock.

The mains power distributor is a protective class 1 unit. A missing earth (ground) contact may cause dangerous voltages in the housing and controls and may lead to electric shock.

- Connect the unit to mains power supplies with protective earth only.
- If there is any sign of obvious damage to the power cord and/or CEE mains connector, do not use the unit and replace it before further use.
- Please ensure the mains connector is accessible at any time to disconnect the unit in case of malfunction or danger.
- Do not connect or disconnect the CEE mains connector under load or live.

Required mains supply network configuration

3-phase 230/400V - 50/60 Hz - 32 A_{max}.


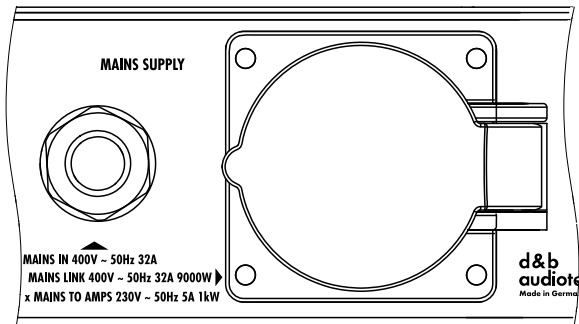


3.2.3 MAINS LINK - 32 A CEE

The MAINS LINK socket allows further system racks to be linked to the mains power supply.

NOTICE!


To avoid any overload of the onsite mains power supply, we recommend you to link no more than **two** further system racks to the respective mains power supply line.

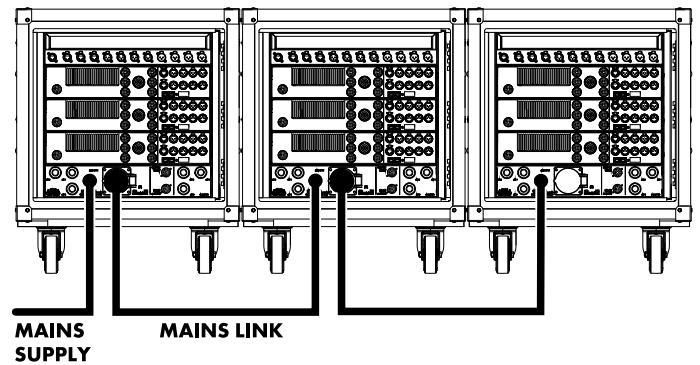

3.3 Front panel

3.3.1 MAINS


When the rack is connected to the onsite mains power supply, the three mains indicators display the presence of the onsite mains supply lines (phase conductor L1-L2-L3).

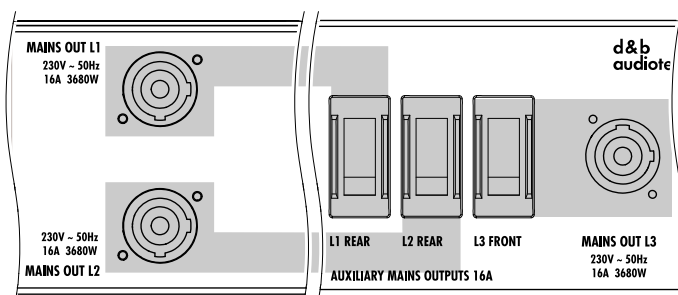

3.3.2 AUXILIARY MAINS OUTPUTS 16A

Three auxiliary mains outputs (powerCON sockets) are provided. One socket is mounted on the front and two sockets on the rear panel. They are intended for the connection of low current devices such as notebooks or additional Ethernet switches.

Each socket is equipped with a dedicated circuit-breaker. Please refer to the assignment as shown in the graphic opposite.



3.3.3 AMPLIFIER MAINS SUPPLIES 16A


Three circuit-breaker are provided in conjunction with the three single-phase mains power lines (L1-L2-L3) of the respective amplifier.

3.3.4 4 CH OUTPUTS - NL8

NOTICE!






The 4 CH OUTPUTS connectors are only intended as an interface to a rack panel or to loudspeaker multicores such as d&b Z5343.xxx and breakout adapters such as d&b Z5347.xxx.

Do not connect any loudspeaker cabinets, neither passive nor active systems, to the 4 CH OUTPUTS connectors, otherwise there is a risk of damaging the loudspeaker components or the amplifier.

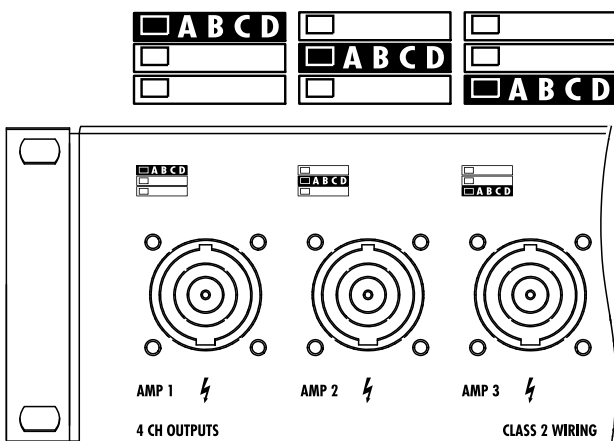

Each of the 4 CH OUTPUTS connectors represents the 4 CHANNEL OUTPUT of the respective D20 amplifier. Each connector carries the output signals of all four channels of the amplifier with the following pin assignment.

Please refer to the corresponding channel assignment label above each connector as shown in the graphic opposite.

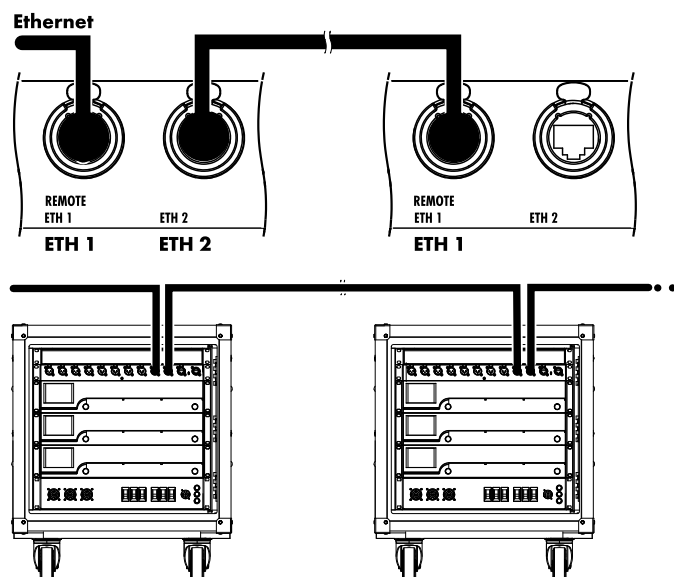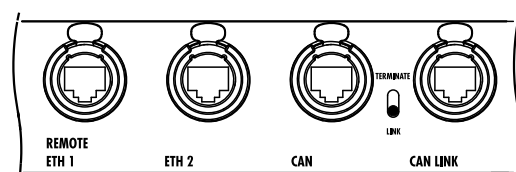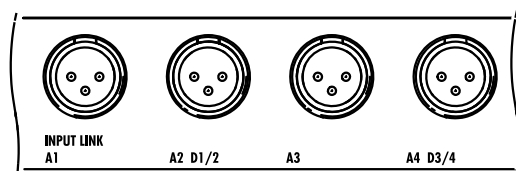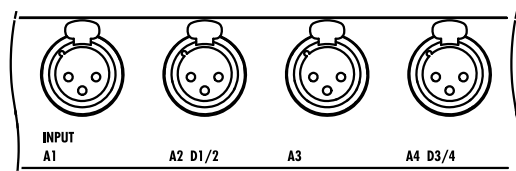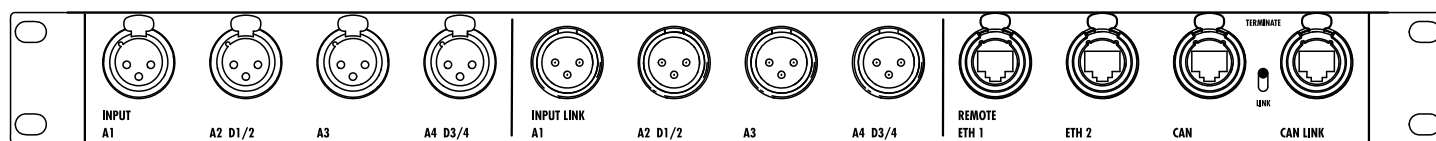

4.1 INPUT

The INPUT section represents the input connectors of the first amplifier while the other two amplifiers are linked within the rack. The INPUT section allows both analog and digital audio signals to be fed to the amplifier.

4.2 INPUT LINK

The INPUT LINK section represents the link output connectors of the last (third) amplifier and allows the linking of further system racks using the enclosed rack link cable (Z5333 Rack link).

4.3 REMOTE

The REMOTE section allows the daisy chaining of system racks within a remote network using the enclosed rack link cable (Z5333 Rack Link).


Ethernet network

ETH 1 Represents the upper etherCON connector of the first amplifier and may be used as input while the other two amplifiers are linked within the rack.

ETH 2 Represents the bottom etherCON connector of the last (third) amplifier and may be used as output.

Note: In a daisy chain topology, if one device or an entire rack fails or is switched off, this also affects all subsequent devices and/or system racks which are then no longer connected to the network either.

A detailed description of remote control via Ethernet is given in the technical information TI 310 (d&b code D5310.EN) which can be downloaded from the d&b website at www.dbaudio.com.

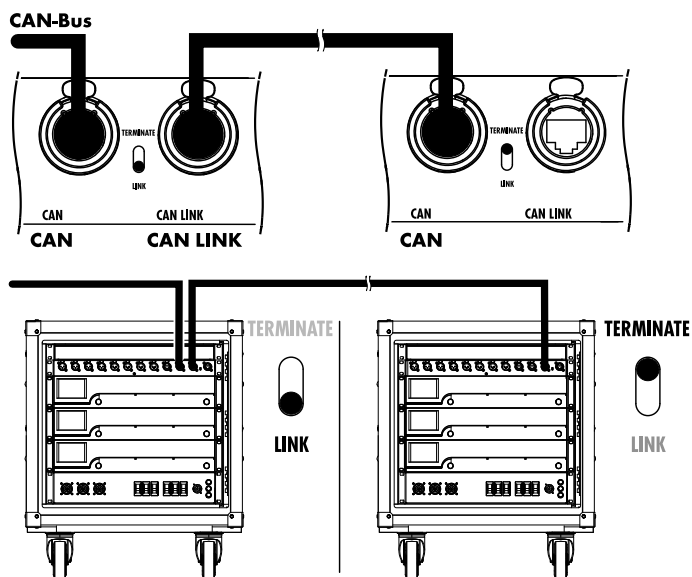

CAN-Bus network

CAN

Represents the CAN input of the first amplifier while the other two amplifiers are linked within the rack.

CAN LINK


Represents the CAN output of the last (third) amplifier.

TERMINATE/ LINK

The built-in termination switch allows two settings:

1. **LINK:** In system racks, at the start of and within a CAN-Bus segment, set the switch to LINK.
2. **TERMINATE:** On the last system rack of a CAN-Bus segment, set the switch to TERMINATE

Note: A detailed description of remote control via the d&b Remote network (CAN-Bus) is given in the technical information TI 312 (d&b code D5312.EN) which can be downloaded from the d&b website at www.dbaudio.com.

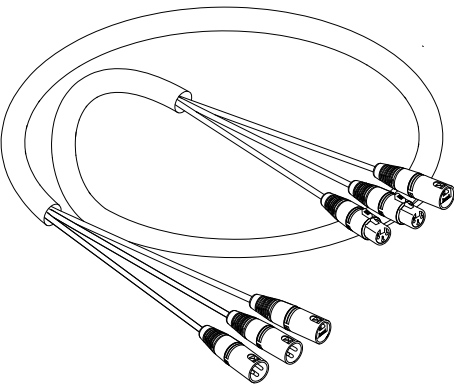


The rack link cable allows further system racks to be linked together.

It is suitable for both analog and digital audio signals as well as for network wiring (Ethernet or CAN-Bus networks).

Technical specifications

Audio connector	2 x XLR female to 2 x XLR male
.....	with color markup
Audio signal capability	Analog
.....	Digital AES3
Network connector	etherCON
Network cable	CAT 5E STP
Length	2 m / 6.5 ft


CAN-Bus

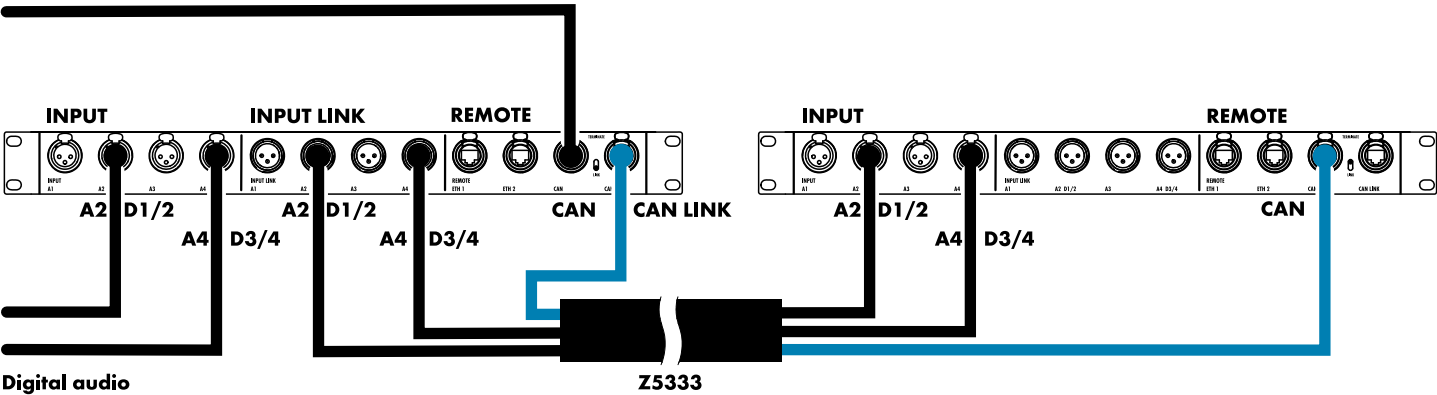

Digital audio

Rack link example:
4ch Digital audio and CAN-Bus

CAN-Bus

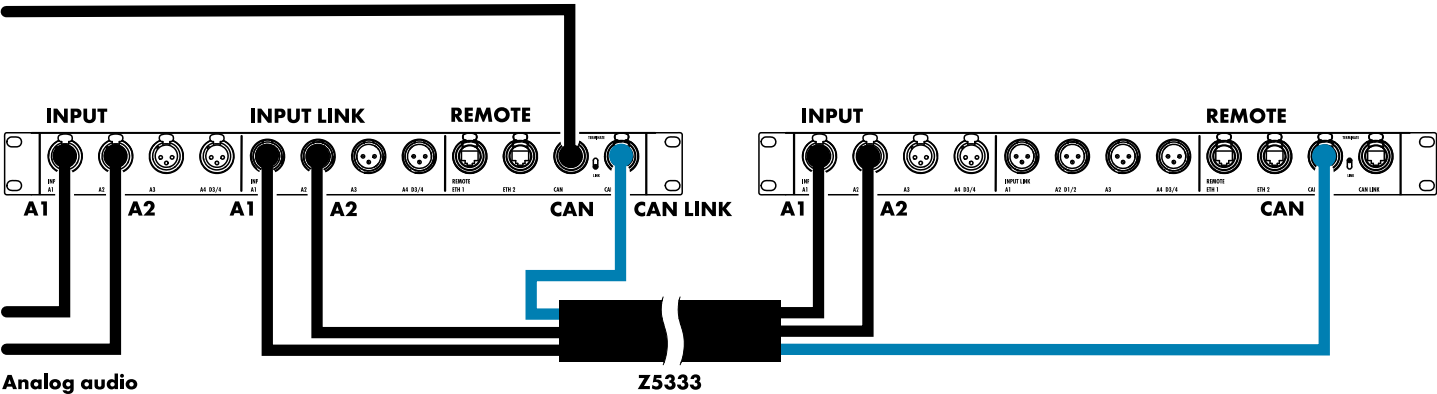

Analog audio

Rack link example:
2ch Analog audio and CAN-Bus

