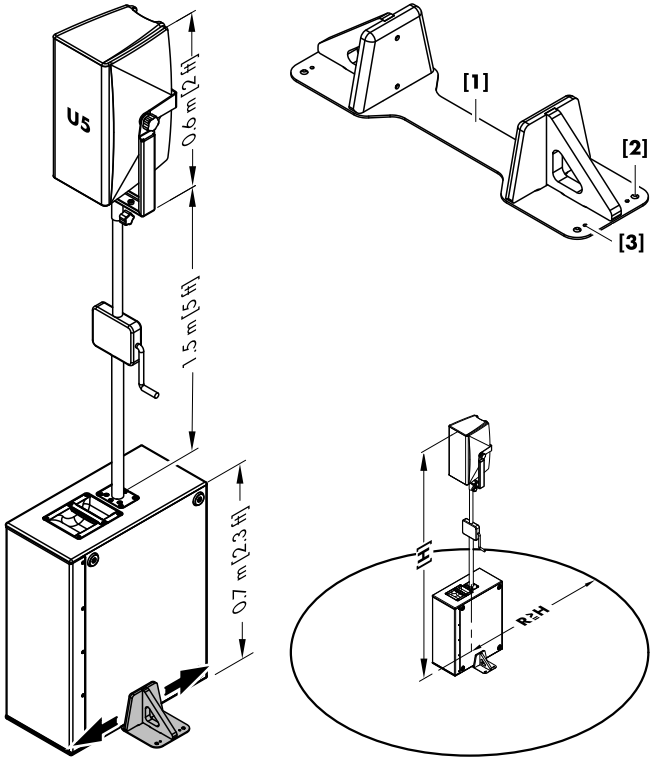


Z5816 Scope of supply and application

Please verify the shipment for completeness and proper condition of the items.

Intended use

The d&b Z5816 Base plate must only be used as described in these mounting instructions.
It acts as a stability support to operate the B10-SUB in vertical (upright) orientation. This also allows to deploy a cabinet such as the d&b U3/U3N or U5/U5N on top using a suitable extension pole.

The Base plate **[1]** is equipped with four rubber feet **[2]** to prevent movement. In addition, four holes **[3]** are provided, which are intended for fixed installation purposes, allowing the base plate to be fixed on the ground.

Application and limits

CAUTION!
Possible risk of personal injury!

It is the responsibility of the person setting up the assembly to prevent the overall assembly from tipping over.
In particular, observe the following limits and recommendations:

- **Max. top load:** 15 kg (33 lb).
- **Max. height [H]:** 2.7 m (8.85 ft).
- Ensure that the entire assembly is horizontally aligned without any inclination.
- Observe the overall height **[H]** of the assembly (leverage effect) and provide a sufficient safety area around the assembly (⇒ rule of thumb: **R ≥ H**).

D2801.EN .01, 04/2026 © d&b audiotechnik GmbH & Co. KG