


The D25 amplifier

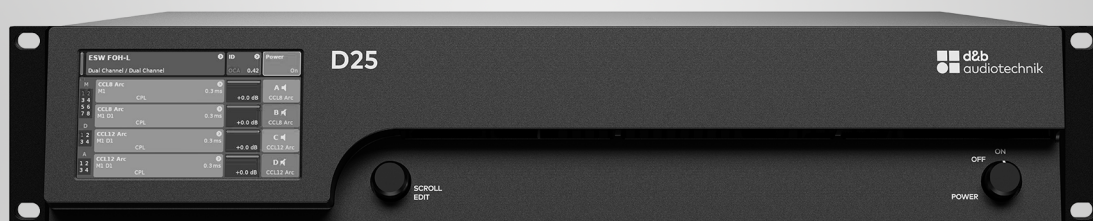

The D25 amplifier represents a new performance level of four channel Class D amplifiers using Digital Signal Processing (DSP) to incorporate loudspeaker specific configurations and user definable setups, equalization and delay functions.

The D25 amplifier has a dynamic range of 112 dB (unweighted) and is designed to drive high voltage d&b loudspeakers while providing comprehensive management and protection capabilities.

The user interface of the amplifier consists of a 4.3" (480 x 272 pix.) color touchscreen in conjunction with a digital rotary encoder providing comprehensive information of the device configuration and enhanced status monitoring.

The D25 includes enhanced energy saving features, power efficiency and Automatic Wake up for environmentally responsible and sustainable Green Building requirements.

Powerful signal processing extends the level of functionality of the onboard features. These include a range of loudspeaker-specific filter functions plus two user-definable 16-band EQs, which facilitate system tuning. The delay capability covers a range of up to 10 seconds.

The DSP unit of the amplifier has a fixed latency of 0.3 ms.

The amplifier can receive one redundant Milan™ Listener stream consisting of up to eight channels. It provides eight Milan inputs.

Additionally, four analog and four AES3 inputs with corresponding link outputs are provided.

Each of the inputs can be routed to any of the output channels.

The D25 amplifier features a flexible Fallback structure, ensuring the transmission of a secondary signal when required.

For applicable d&b loudspeakers, d&b LoadMatch enables the D25 amplifier to preserve tonal balance when cable lengths of up to 70 m (230 ft) are used.

The D25 utilizes a switch mode power supply with automatic mains range selection and active Power Factor Correction (PFC) to produce a clean current draw and ensure stable and efficient performance under adverse mains conditions.

Remote control and full system integration are realized using the d&b ArrayCalc simulation software and R1 Remote control software.

The amplifier includes two Ethernet ports (1 Gbit/100 Mbit) on RJ 45 etherCON® connectors (ETH1/PRI - ETH2/SEC) with the OCA/AES70 protocol incorporated for the upper (ETH1/PRI) connector socket and star wiring topology.

The D25 amplifier

Operating conditions

Operating temperature (*continuous/**short-term)	
..... -10 °C ... +40*/+50** °C (+14 °F ... +104*/+122** °F)	
Storage temperature	 -20 °C ... +70 °C (-4 °F ... +158 °F)
Humidity (rel.), non-condensating	 < 70 %
Maximum height above sea level	 2000 m/6560 ft

Power supply

Switched mode power supply with automatic mains range selection and active Power Factor Correction (PFC).

Mains connector	 powerCON® TRUE 1 TOP
Mains fuse	 internal
Rated mains voltage (High range)	 208 - 240 V, 50 - 60 Hz
Rated mains current (High range)	 13 A
Rated mains voltage (Low range)	 100 - 127 V, 50 - 60 Hz
Rated mains current (Low range)	 20 A

Protection circuits

Mains and power supply: Overvoltage and undervoltage, inrush current limiter, internal fuse.

Output: Overcurrent, DC offset, HF voltage limiter, pop-noise suppression.

Cooling: Temperature-dependent RPM of fan, self-resetting overtemperature protection.

Power consumption (typical values)

Standby	 21 W
Idling	 130 W
Peak output	 2275 W

Audio power outputs*

SPEAKER OUTPUTS A/B/C/D	 4 x NL4
SPEAKER OUTPUTS A/B MIX 2-WAY / C/D MIX 2-WAY	 2 x NL4
4 CHANNEL OUTPUT	 1 x NL8
Maximum output voltage/current	 120 V _{peak} /35 A _{peak}
Output power rating EIA-426B noise CF 12 dB	 4 x 900 W/8 Ω
.....	 4 x 1800 W/4 Ω
Sine wave 1 kHz, long term, +40 °C (+104 °F)	 4 x 250 W/4 Ω
Frequency response (-1 dB, linear mode)	 35 Hz - 25 kHz
Gain (Linear mode @ 0 dB)	 31 dB

Output noise/Dynamic range

Output noise (BW 20 kHz)/dynamic range (BW 20 kHz, reference 180 V _{pk})	
Analog input	 350 μV _{RMS} /108 dB
Analog input, A-weighting	 280 μV _{RMS} /110 dB
Digital/Milan input	 220 μV _{RMS} /112 dB
Digital/Milan input, A-weighting	 170 μV _{RMS} /114 dB

THD+N/Crosstalk

THD+N (unweighted, 20 - 20 kHz)	
4 x 250 W/8 ohms	 < -86 dB/0.005 %
4 x 250 W/4 ohms	 < -83 dB/0.007 %
Crosstalk (20 - 20 kHz)	 < -70 dBr
.....	 4 x 250 W into 8/4 Ω

Analog inputs and outputs

INPUT A1 - A4	 3 pin XLR female
Pin assignment	 1 = GND 2 = pos. 3 = neg.
Input impedance	 32 kΩ, electronically balanced
CMRR @ 100 Hz/1 kHz / 10 kHz	 >80/>80/>70 dB
Maximum input level (balanced/unbalanced)	 +25/+18 dBu
.....	 +27.3 dBu @ 0 dBFS
LINK A1 - A4, parallel to input	 3 pin XLR male
Pin assignment	 1 = GND 2 = pos. 3 = neg.

Digital inputs and outputs

IN - D1/2, D3/4	 3 pin XLR female, AES3
Pin assignment	 1 = GND, 2 = AES Signal, 3 = AES Signal
Input impedance	 110 Ω, transformer balanced
Sampling frequency	 44.1 48 96 192 kHz
Word length	 16 - 24 bit
OUT - D1/2, D3/4	 3 pin XLR male
.....	 electronically balanced
Output modes	 Mains on: analog signal buffering (refresh)
.....	 Mains off/power fail: bypass relay

Milan™ inputs

Device type	 Endstation
Input channel streams	 1 stream with up to 8 channels @ 48/96 kHz
Redundancy	 Yes (always)
Routable Milan™ inputs	 M1-8

Digital Signal Processing

System start-up time	 < 45 sec.
Time to tone (Standby/ReadyStandby)	 < 4/< 1 sec.
Time to tone (Off/Wake on Audio)	 < 45 /< 4 sec.
Conversion	 96 kHz
Latency analog/digital (AES) input	 0.3/0.3 msec.
A/D conversion	 27 Bit (dual-stacked A/D converters)
Internal processing	 Combination of high-resolution fixed point
.....	 and floating point processing
Equalizer	 two user definable 16-band equalizers
.....	 Filter types: PEQ/Notch/HiShlv/LoShlv/Asym
Delay	 0.3 msec. - 10 sec.
Frequency generator	 Pink noise or Sine wave 10 Hz - 20 kHz

Network connections

Connector type	 2 x RJ 45 (etherCON®)
Switch	 integrated 2-port, 1 Gbit/100 Mbit
IP address/Subnet mask	 192.168.1.25/255.255.255.0
ETH1/PRI	 Milan™, Remote control via R1
.....	 star topology
ETH2/SEC	 Milan™ redundancy only, no remote control
.....	 star topology

The D25 amplifier

Controls and indicators




POWER Mains power switch
 SCROLL/EDIT Digital rotary encoder
 TFT color touchscreen 4.3"/480 x 272 pixels

Fan noise emission

Rack mounted, measured on axis, 1 m (3.3 ft) to front panel, A-weighting.
 Min./Max. RPM 30/50 dB(A)
 Ambient temperature 23 °C/73.4 °F

Dimensions and weight

Height x width x depth 2 RU x 19" x 512 mm (20.2")
 Weight 13.8 kg/30.4 lb

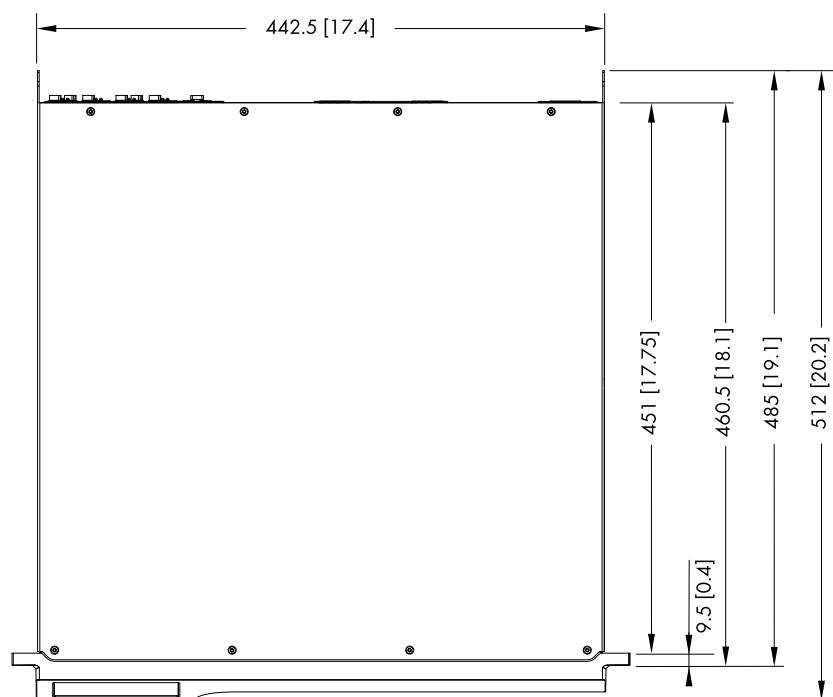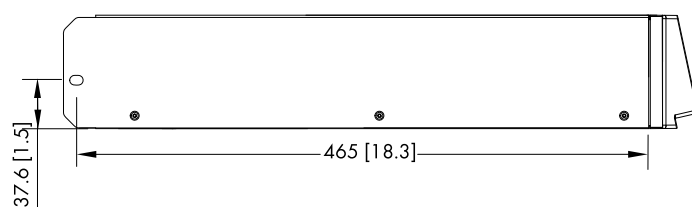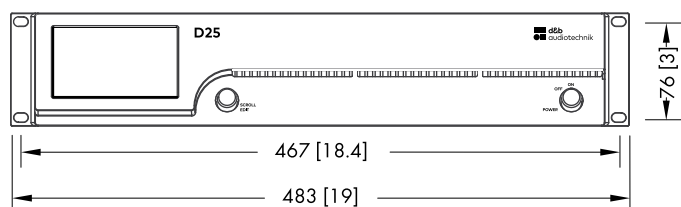

D25 dimension in mm [inch]

Features and benefits

- Increases overall system efficiency
- Advanced voltage management
- Energy-efficient for minimal ecological impact
- Enhanced DSP capabilities accommodates future system architecture

Applications

- International Touring and Rental
- Musical theatre rental
- Corporate and industrial rental

The D25 amplifier

Architectural specifications

The amplifier shall be four channel incorporating digital signal processors (DSP) to provide loudspeaker specific configurations and functions and dedicated protection circuits. It shall be equipped with digital and analog signal inputs as well as link outputs, remote control and monitoring capabilities via Ethernet (OCA/AES70). User interface shall be via a 4.3" (480 x 272 pix.) color touchscreen in conjunction with a digital rotary encoder while remote control shall be via dedicated remote control software.

Four analog XLR input and link output connectors shall be provided.

Two digital input connectors shall be provided, each accepting a 2 channel digital (AES3) audio signal.

Analog inputs shall be electronically balanced with an input impedance of 32 kOhms.

The digital inputs shall be transformer balanced with an input impedance of 110 ohms while the digital link output shall be electronically balanced providing analog signal buffering (refresh) and power fail relay (Bypass).

The device shall act as a Milan™ Endstation with one redundant Milan Listener stream @48/96 kHz consisting of up to eight channels. Eight routable Milan inputs (M1-8) shall be provided.

Signal processing shall utilize 96 kHz sampling rate while the latency shall not exceed 0.3 msec.

The output connector options shall be 4 x NL4 for Dual Channel mode and 2 x NL4 for Mix TOP/SUB and/or 2-Way Active modes. A four channel out connector (NL8) shall be provided for loudspeaker multicore purposes. Output configurations shall be selectable for Dual Channel, Mix TOP/SUB and 2-Way Active modes.

It shall incorporate two user definable 16-band equalizers for independent application to each channel allowing parametric filters, notch, hi- and lo-shelf filters as well as asymmetric filters.

A signal delay capability of up to 10 sec. shall be incorporated for independent application to each channel.

It shall contain a signal generator offering pink noise or sine wave program.

Compensation for cable length shall be incorporated to improve impulse response.

Load monitoring and System check functions shall be included to ascertain the status of the loudspeaker impedance. Load monitoring shall allow impedance monitoring to determine the status of an LF or HF driver in systems with multiple elements, even if these are crossed over passively. Input monitoring shall be included to allow detection of incoming pilot signals.

A Fallback function shall be available to enable the definition of primary (Regular) and secondary (Fallback) signal paths for analog and digital input signals with two different modes (Manual or Auto). It shall ensure that any secondary or emergency signal fed to the Fallback inputs is transmitted when required.

A Override function shall be available to allow any of the signal inputs, either analog or digital, to be set as a major signal path with highest priority for general messages or emergency services.

An AutoStandby function shall automatically switch the amplifier to Standby mode after a predefined time when the incoming signal level at the individually specified inputs drops below a defined threshold. The function shall be independent of the mute status of the respective channels.

An AutoWakeup function shall automatically repower the amplifier, when an input signal is present and exceeds a defined threshold.

A switched mode power supply shall be incorporated and shall allow automatic mains range selection of 100 to 127 V AC and 208 to 240 V AC, 50 - 60 Hz mains power supply voltages.

Active power factor correction (PFC) shall be incorporated to provide a clean and efficient sinusoidal current draw.

Mains voltage monitoring, mains inrush current limiter, self-resetting overtemperature, under- and overvoltage protection shall be incorporated. It shall have temperature and signal controlled fans for cooling the internal assemblies.

The power amplifier channels shall have ground fault protection, output pop-noise suppression, DC offset protection, output HF voltage limitation, output current limitation/protection and self-resetting overtemperature protection.

The output power shall be 4 x 900/1800 W into 8/4 ohms (EIA-426-B signal with a crest factor (CF) of 12 dB, all channels driven) while the maximum output voltage shall be at least 120 V_{peak} and the maximum output current shall be 35 A_{peak}.

THD+N (20 Hz - 20 kHz) shall be < -86 dB/0.005% and the Crosstalk (20 Hz - 20 kHz) shall be < -70 dB while the dynamic range (SNR - digital input unweighted) shall be at least 112 dB.

The dimensions (H x W x D) shall not exceed 2RU x 19" x 512 mm (20.2") and shall weigh no more than 13.8 kg (30.4 lb).

The amplifier shall be the D25 by:
d&b audiotechnik GmbH & Co. KG.